


Coloris - Lotus

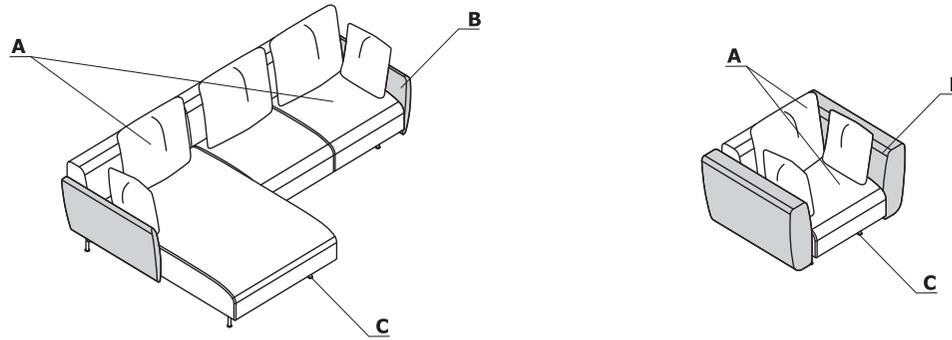

Matériau	Couleurs	Lotus - fauteuil, canapé															
		A - Assise	B - Accoudoirs	C - Piétement													
Tissu	Medley	✓	✓														
	**Atlantic	✓	✓														
	Vita	✓	✓														
	****Charles	✓	✓														
	Go Check	✓	✓														
	Mica	✓	✓														
	Synergy	groupe III ✓	groupe III ✓														
	Tessa	groupe III ✓	groupe III ✓														
	Oceanic	groupe III ✓	groupe III ✓														
	Quest	groupe III ✓	groupe III ✓														
	Grain	groupe III ✓	groupe III ✓														
	Atlas	IV. Gruppe ✓	IV. Gruppe ✓														
	Cuir	IV. Gruppe ✓	IV. Gruppe ✓														
	Méca	M115 - noir semi-mat RAL 9005			✓												


** Il est possible de commander l'ensemble des références Atlantic de l'offre Gabriel (hors standard MDD), sous un délai de 8 semaines.

**** Il est possible de commander l'ensemble des références Charles de l'offre Dekoma (hors standard MDD), en délai de livraison standard.

MEDLEY



M-60999




M-66008



M-60003




M-61189




M-65011



M-66010



M-67006



M63064



M-63017



M-64019



M-68005



M-62054



M-62002

Group II

VITA



V-07



V-04




V-29




V-18



V-19




V-12



V-10



V-11



V-29



V-09



V-13



V-02



V-03

Group II

CHARLES

Group II



C-01



C-05




C-06




C-14




C-18




C-21



C-30



C-31



C-32



C-35



C-41



C-44



C-45

GO CHECK

Group II



G-66134



G-66140




G-66138




G-66137



G-66136



G-68149



G-68152



G-61145




G-61144




G-64172




G-64171



G-63079



G-64183



G-60079

MICA

Group II



MC-01



MC-02



MC-03



MC-04



MC-05



MC-06




MC-07



MC-08



MC-09



MC-10



MC-11



MC-12



MC-13



MC-14



MC-15



MC-16



MC-17



MC-18



MC-19

SYNERGY

Group III



LDS27



LDS29



LDS20



LDS08



LDS61




LDS53



LDS50



LDS60




LDS69



LDS57



LDS84



LDS85



LDS86



LDS88



LDS79



LDS19



LDS44

Price group	Fabric	Material	Weight	Abrasion resistance rubs	Pilling resistance	Colour fastness to light	Colour fastness to rubbing	Flammability	More information
I	NEMO	Polyester 100%	366g/m2	PN-EN ISO 12947 - 2:2 100,000	Scale 1-8, max 8, PN-EN ISO 105 B02:2013 3-4	Scale 1-5, max 5, PN-EN 1021 - 2:2007, PN-EN 1021 - 1:2007	Scale 1-5, max 5, EN ISO 105x12, (wet/dry) 4-5		
II	RUNNER	Polyester 100%	320g/m2, 510g/lm	70,000 Martindale, BS EN 14465, EN ISO 12947-2	Scale 1-5, max 5, EN ISO 12945-2 4-5	Scale 1-8, max 8, EN ISO 105-B02 5-7	Scale 1-5, max 5, EN ISO 105x12, (wet/dry) 4-5	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, California Bulletin CAL 117-E-Class 1, CA TB 117-2013, Class Uno UNI 9175 Class 1	Acoustic test sound absorption ISO 354
II	MEDLEY	Polyester 100%	364g/m2, 510g/lm	75,000 Martindale	Scale 1-5, max 5, EN ISO 12945-2 4	Scale 1-8, max 8, EN ISO 105-B02 5-7	Scale 1-5, max 5, EN ISO 105x12, (wet/dry) 4-5/4-5	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, California Bulletin CAL 117-E-Class 1, CA TB 117-2013, Class Uno UNI 9175 Class 1	Acoustic test sound absorption: ISO 354
II	ATLANTIC	Polyester 100%	353g/m2, 530g/lm	110,000 Martindale, EN ISO 12947-2)		Scale 1-8, max 8, EN ISO 105-B02 5-7	Scale 1-5, max 5, EN ISO 105x12, (wet/dry) 4-5/4-5	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, ASTM E 84, BS 476 Part 7, Class Uno UNI 9175 Class 1, NF P 92-503 M3P, CA TB 117-2013	
II	VITA	Surface: PVC, 98.5%, PU 1.5% Substrate: Polyester 50%, 50% Cotton	850g/m2, 1190g/lm	100,000 Martindale, EN ISO 5470-2:2003,		Scale 1-8, max 8, EN ISO 105-B02 5-7	Scale 1-5, max 5, EN ISO 105x12, (wet/dry) 4-5/4-5	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5852:2006 Section 4, Ignition Source 5, BS 7176:2017 Medium Hazard NF P 95 503 M2, FMVSS 302 (ISO 3795)	Flexing cycles: BS EN ISO 7854:1997 Method B, 400.000, Anti-microbial/ Anti-fungal: AATCC 147:2011
II	CHARLES	Polyester 100%	433g/m2	90,000 Martindale, EN ISO 12947-2	Scale 1-5, max 5, EN ISO 12945-2 5	EN ISO 105-B02 5	Scale 1-5, max 5, EN ISO 105-X12, (wet/dry) 4-5	EN1021-2	Thread offset in the seam: EN ISO 13 936-2
II	GO CHECK	Trevira cs 100%	310g/m2	80,000 Martindale, EN ISO 12947-1,2 60,000 Double rubs wyzenbeek (ASTM D4157-07)	Scale 1-5, max 5, EN ISO 12945-2 5	Scale 1-8, max 8, EN ISO 105-B02 5-8	Scale 1-5, max 5, EN ISO 105-X12:2001, (wet/dry) 4-5/4-5	BS EN 1021-1&2 Cigarette and Match, BS 5852:2006 Crib 5, BS 7176:2017 Medium Hazard, NFP 92-503/504/505 M1, Class Uno UNI 9175 Class 1	
II	MICA	97% post-consumer recycled polyester / 3% polyester	218g/m2	60,000 Martindale, EN ISO 12947-2 100,000 Double rubs wyzenbeek (ASTM D4157-07)	Scale 1-5, max 5, EN ISO 12945-2 4-5	Scale 1-8, max 8, EN ISO 105-B02 5-8	Scale 1-5, max 5, EN ISO 105-X12:2001, (wet/dry) 4-5/4-5	BS EN 1021-1 Cigarette, EN ISO 105-X12:2001, (wet/dry) 4-5/4-5, CA TB 117-2013, ASTM E 84 Class 1, BS 476 Part 7 Class 1	Acoustic test air flow resistanc EN 29053 & ISO 9053-1 (airflow resistance)
III	XTREME CS / YS	Trevira Clame 100% (CS), Recycled 100% (YS), Non metallic dyestuffs, Flame Retardant polyester	310g/m2 435g/lm	60,000 Martindale		ISO 105 B02: 6	ISO 105-X12:2001, (wet/dry) 4/4	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 7176 Low Hazard NF P92-507 M1, DIN 4102 B1, UNI 9175 Classe 1 IM, UNI 8456, UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800-1, NF D 60-013 (only CS)	
III	SYNERGY	Virgin Wool 95%, Polyamide 5%	400g/m2 560g/lm	100,000 Martindale		ISO 105 B02: 5	ISO 105-X12:2001, (wet/dry) 4/4	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 7176 Low Hazard, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1	
IV	FIELD 2	100% Trevira CS	321g/m2 450g/lm	100,000 Martindale EN ISO 12947	EN ISO 12945-2 4-5	ISO 105 B02: 5-7		BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5852 Crib 5, DIN 4102 B1 FAR 25.853, CA TB 117-2013, MED. Certificate IMO, NF P 92 507 M1, UNI 9177 classe 1, US Cal. Bull. 117-2013	
IV	ATLAS	New wool 90% Nylon 10%	286g/m2 400g/lm	100,000 Martindale EN ISO 12947	EN ISO 12945-2 4-5	ISO 105 B02: 6-7	ISO 105-X12:2001, (wet/dry) 4-5/4-5	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 Ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013, MED. CertificateIMO	
IV	LEATHER	Leather type - corrected grain leather Type of finishing - pigmented leather		Dry: 500 cycles - min. 4 grey scale Wet: 250 cycles - min. 4 grey scale UNI EN ISO 11640		Light fastness: min. 4 grey scale UNI ISO 105-802		Match flame test: No ignition UNI EN 1021-1-2006 BS EN 1021-1-2006	