

# LOCKERS


design office



**CARCASS**

Bottom, top and sides made from 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC), back panels in 8mm MFC, shelves in 25mm MFC.

Finish options:

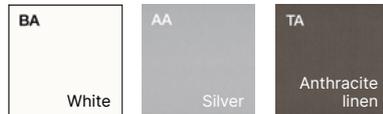

**HINGED DOORS IN MELAMINE FACED CHIPBOARD (MFC)**

Made from 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) finished with 1mm matching ABS impact resistant edge. Panel density: 670/730 kgs per cubic meter. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening. Lockable doors supplied with two folding keys.

Finish options:



**HINGED DOORS IN LACQUERED MELAMINE FACED CHIPBOARD (MFC)**

Made from 18mm easy to clean scratch-resistant anti-reflective melamine faced chipboard (MFC) finished with 1mm matching ABS impact resistant edges. The surface is coated using matt lacquers in a variety of colors. Panel density: 670/730 kgs per cubic meter. Height/width/depth adjustable anti-corrosion treated metal hinges allowing 105° door opening. Lockable doors supplied with two folding keys.

Finish options:



Production lead time: 5 weeks excluding delivery time. Apart from the shown finish options any RAL color can be made to order.

**HANDLES FOR MFC HINGED DOORS**

Standard ABS handle  
Look




Silver (J)  
White (JB)  
Anthracite (JR)

Optional metal handles  
Zen




Silver (Z)  
White (A)  
Chrome (Y)  
Anthracite (Q)

**LOCKER MADE OF FIVE MODULES**

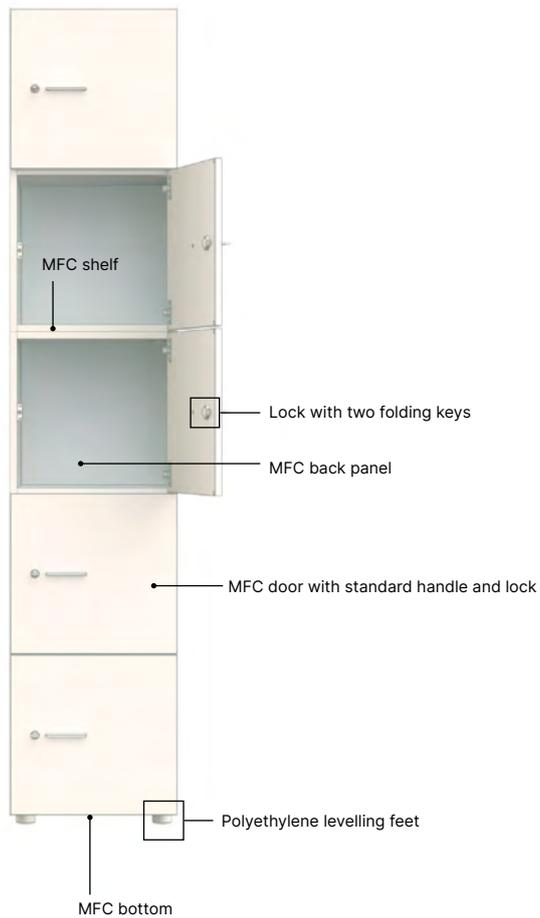


Five  $\varnothing$ 50mm 27mm high polyethylene feet, 0-15mm adjustable  $\varnothing$ 25mm levellers.

18/30mm thick cladding top panels

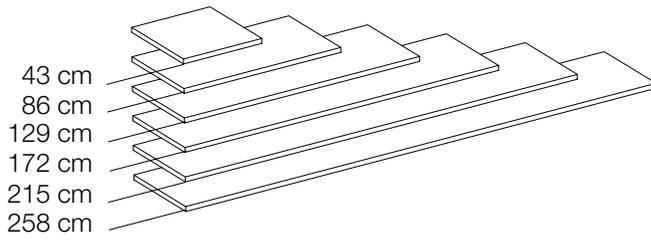


18/30mm thick cladding side panels

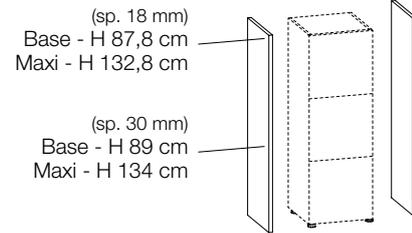

Please note: cladding side panels for 3-door reduced height and 5-door reduced height lockers are available as a special.

413mm high locker doors - sizes do not include cladding tops and sides

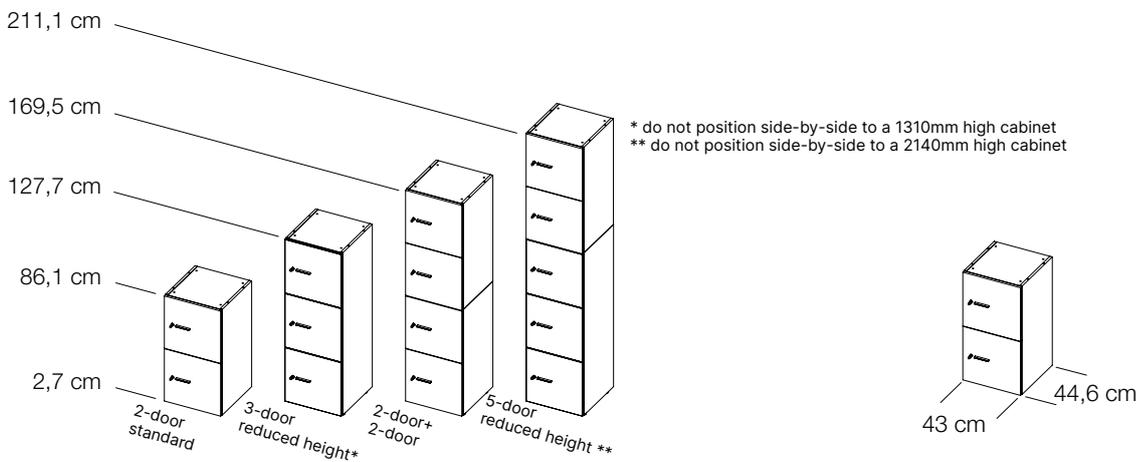


423mm high locker doors - sizes do not include cladding tops and sides





24mm high ABS plinth, conceals  
height adjustable feet



**18MM THICK CLADDING TOP AND CLADDING SIDE PANELS**

Melamine:

<b>BA</b> White	<b>GR</b> Grey	<b>CL</b> Concrete	<b>EC</b> Eucalyptus	<b>OL</b> Elm	<b>NO</b> Canaletto Walnut
<b>RK</b> Oak	<b>OB</b> Whitened Elm	<b>FA</b> Beech			

Lacquered:

<b>LB</b> White	<b>LL</b> Grey White	<b>LS</b> Silk Grey	<b>NK</b> Light Beige	<b>LE</b> Beige	<b>LT</b> Beige Grey	<b>NU</b> Dark Brown	<b>NW</b> Ocher
<b>LA</b> Orange	<b>NJ</b> Burnt Orange	<b>LH</b> Flame Red	<b>LR</b> Purple Red	<b>LI</b> Black Red	<b>LZ</b> Sapphire Blue	<b>NQ</b> Cobalt Blue	<b>LC</b> Pigeon Blue
<b>LD</b> Ocean Blue	<b>LP</b> Pine Green	<b>NV</b> Olive Green	<b>LF</b> Telegrey 4	<b>LG</b> Grey	<b>LO</b> Urme Grey	<b>LN</b> Traffic Black	

Production lead time: 5 weeks excluding delivery time. Apart from the shown finish options any RAL color can be made to order.

**30MM THICK CLADDING TOP AND CLADDING SIDE PANELS**

Melamine:

<b>BA</b> White	<b>GR</b> Grey	<b>CL</b> Concrete	<b>EC</b> Eucalyptus	<b>OL</b> Elm	<b>NO</b> Canaletto Walnut
<b>RK</b> Oak	<b>OB</b> Whitened Elm	<b>FA</b> Beech			

Wood veneer:

<b>OG</b> Elm	<b>NA</b> American walnut	<b>EB</b> Ebony
------------------	------------------------------	--------------------

Leather:

<b>CRS</b> Red	<b>CMA</b> Brown	<b>CGA</b> Anthracite	<b>CNE</b> Black
-------------------	---------------------	--------------------------	---------------------



## MATERIALS AND RECYCLABILITY

Panels used on Storage range are exclusively 100% made by recycled wood and respect low formaldehyde emission (CATAS certification Quality Award CARB). Resins used on panels and melamine paper are SVHC substances free (reported on ECHA list update to 12/01/2017).



## STANDARDS

Storage range has passed the following tests, attested by **CATAS** analysis laboratory in San Giovanni al Natisone (UD).

- General safety requirements EN 14073-2:2004, par. 3.4
- Pull out of shelves EN 14073-3:2004, clause 5.3.1
- Strength of shelf supports EN 14073-3:2004, clause 5.3.2
- Stability of free standing units EN 14073-3:2004, par. 5.5
- Strength of unit EN 14073-3:2004, clause 5.2
- Durability test on hinged and pivoted doors EN 14074:2004, par. 6.3.3
- Horizontal static force on open door EN 14074:2004, clause 6.3.2
- Deflection of shelves EN 16122:2012 + AC:2015, clause 6.1.4



## CERTIFICATIONS

Constantly receptive to market requirements, Quadrifoglio Sistemi d'Arredo pay special attention on quality and safety contents in order to provide high products and services. The Company has reached certifications UNI EN ISO 9001/2015, UNI EN ISO 14001/2015 and UNI EN ISO 45001/2018 to confirm his policy. Our products are certified and ensured by FSC™ and ECOLOGICAL PANEL.

COMPANY WITH  
MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
ISO 9001 • ISO 14001  
ISO 45001



## GREEN ENERGY

The Company had installed the photovoltaic system with 4.500 solar panels in a 7.350 m<sup>2</sup> surface that covers almost entirely the factory. The photovoltaic is able to produce 1Mw of a quiet green energy, that does not harm the environment and is waste-free. With his high production capacity the photovoltaic allows us to reduce emissions in the atmosphere of all those polluting substances and to those that contribute to the greenhouse effects. Consequently, such measures make us save every year 180 tonne of petrol oil, 440 tonne of CO<sub>2</sub>, 514kg of sulphur dioxide, 448 kg of nitrogen oxide and 23kg of dust.



## TRANSPORT

Packaging is reduced in order to decrease volumes. Goods collections are responsibly managed and organised with the aim of optimise transports, reducing atmosphere emissions.